


DuraFlash™

BGAE240 | eMMC

SMART's DuraFlash BGAE240 eMMC is an embedded memory solution that combines NAND Flash memory, an embedded MMC (MultiMediaCard) controller, and advanced firmware in a small BGA (Ball Grid Array) package that provides stable, yet cost effective high-density embedded storage.

SMART's BGAE240 eMMC solution is available in the standard JEDEC 0.5mm pitch, 153-ball package, as well as an eMMC interposer module which has a footprint and pin-out compatible with the JEDEC Standard 1.0mm pitch, 100-ball package. The 100-ball package offers a solution with large ball pitch and ball diameter which enables lower cost PCB designs, simplifies PCB routing with wider metal traces, resulting in better thermal dissipation.

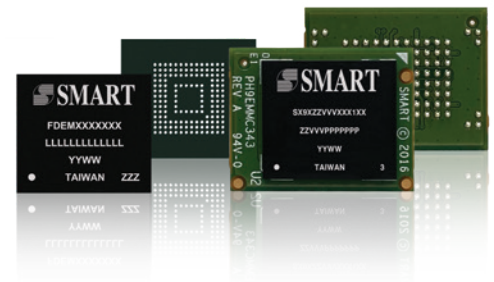

Features & Benefits

- Compliant to JEDEC v5.0 Standard
- Capacities from 8GB to 64GB
- Pre-Configurable to pSLC Enhanced Storage Media Mode
- Industrial Temp (-40°C to +85°C)
- VCC = 3.3V and VCCQ = 3.3V or 1.8V

Applications

- Factory Automation
- Medical Devices
- Networking Appliances
- POS Terminals
- RFID Scanners
- Single-Board Computers
- VoIP

Product Family Overview

Capacity	Sequential Performance
BGAE240 eMMC (153-ball BGA)	
4GB to 64GB	Up to 270MB/s Read; Up to 95MB/s Write
BGAE240 eMMC (100-ball Interposer Module)	
4GB to 64GB	Up to 270MB/s Read; Up to 95MB/s Write

Specifications

	BGAE240 153-ball	BGAE240 100-ball
NAND Type	MLC	
Performance		
Host Interface Rate (maximum)	eMMC v5.0	
Capacities	4GB to 64GB	
Sequential Read (maximum)	270 MB/s	
Sequential Write (maximum)	95 MB/s	
Random Read (maximum)	5.3K IOPS	
Random Write (maximum)	1.2K IOPS	
Reliability		
Data Retention	10 years	
Error Correction	BCH	
Power		
Input Voltage	3.3V ± 5%	
Environmental		
Operating Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction	
Operating Vibration	20G 80-2000Hz, 1.52mm 20-80Hz, 3 axis	
Operating Temperature	Industrial: -40°C to +85°C Wide: -40°C to +105°C	
Storage Temperature	-40°C to +85°C	
Physical		
Length	11.5 mm	14 mm
Width	13 mm	18 mm
Height	1 mm	2.45 mm

Ordering Information

Part Number	Density
BGAE240 153-ball	
Industrial Operating Temperature (-40°C to +85°C)	
SH9MCGP1ATI01	64GB
SH9MBGP1ATI01	32GB
SH9MAGP1ATI01	16GB
SH9M8GP1ATI01	8GB
SH9M4GP1ATI01	4GB
BGAE240 153-ball	
Wide Operating Temperature (-40°C to +105°C)	
SH9MBGP1BTW01	32GB
SH9MAGP1BTW01	16GB
SH9M8GP1BTW01	8GB
SH9M4GP1BTW01	4GB
BGAE240 100-ball	
Industrial Operating Temperature (-40°C to +85°C)	
SH9QCGP1ATI01	64GB
SH9QBG1ATI01	32GB
SH9QAGP1ATI01	16GB
SH9Q8GP1ATI01	8GB
SH9Q4GP1ATI01	4GB
BGAE240 100-ball	
Wide Operating Temperature (-40°C to +105°C)	
SH9QBG1BTW01	32GB
SH9QAGP1BTW01	16GB
SH9Q8GP1BTW01	8GB
SH9Q4GP1BTW01	4GB



For more information, please visit: www.smartm.com

Headquarters/North America:

T: (+1) 800-956-7627 • T: (+1) 510-623-1231
F: (+1) 510-623-1434 • E: info@smartm.com

Latin America:

T: (+55) 11 4417-7200 • E: sales.br@smartm.com

Asia/Pacific:

T: (+65) 6678-7670 • E: sales.asia@smartm.com

EMEA:

T: (+44) 0 7826-064-745 • E: sales.euro@smartm.com

Customer Service:

T: (+1) 510-623-1231 • E: customers@smartm.com